

GEO-FLO REPLACEMENT PUMPS



Specifications:

Available Grundfos Circulators:

All Circulators 1 Phase 60 Hz
UP26-99F 115 VAC 2.18 A Cast Iron
UP26-99F 230 VAC 1.07 A Cast Iron
UP26-116F 230 VAC 1.75 A Cast Iron
UP26-116BF 230 VAC 1.75 A Bronze

Approved Liquid Solutions:


Methanol
Propylene Glycol

Additional Information:

Maximum Operating Pressure: 150 PSI
Minimum Operating Temperature: 20 F
Maximum Operating Temperature: 120 F

Weight: 12 Lbs

PERFORMANCE CURVES

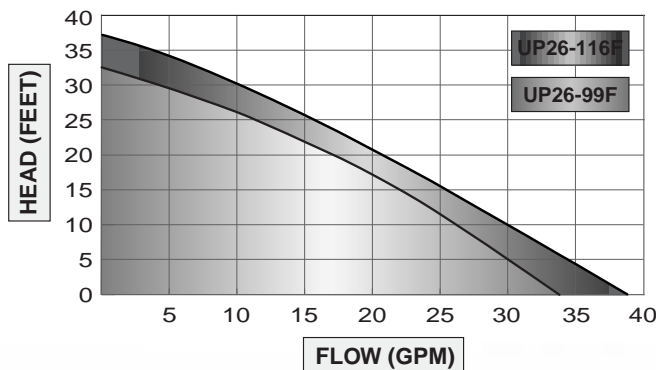

GEO-FLO PRODUCTS CORPORATION

905 Williams Park Drive, Bedford Indiana 47421 Bus (800)784-8069 Fax (812)275-8523
Manufacturers of quality geothermal loop pump modules and accessories since 1988