

GEO-THERMAL LOOP PUMP MODULE

GEO-FLO ***GPM-3*** ***ISOLATION FLANGE MODULE***

COMING SOON... HANDHELD ELECTRONIC DISPLAY

FEATURES

- Fully assembled and leak tested
- Compatible with all brands
- Choose between (4) Grundfos circulators
- 1" FPT bronze flange isolation valves
- Rustproof aluminum mounting brackets
- All components easily serviceable
- Quiet and Reliable operation
- Compact attractive design

5-YEAR WARRANTY
PARTS & LABOR



GEO-FLO PRODUCTS CORPORATION

905 Williams Park Drive, Bedford Indiana 47421 Bus (800)784-8069 Fax (812)275-8523
Manufacturers of quality geothermal loop pump modules and accessories since 1988

Operation:

When the geothermal system is operating, the circulator pumps in the GPM module energize and circulate the liquid solution through the geothermal heat pump and the earth loop, enabling the heat transfer process to occur.

Installation:

The GPM series loop pump modules are designed for quick and easy installation. Each module can be wall mounted using the convenient slotted mounting holes provided.

All external liquid connections are standard 1" NPT to accommodate standard fittings.

Note: Check local codes for specific installation requirements.

Specifications:

Available Grundfos Circulators:

- All Circulators 1 Phase 60 Hz
- UP26-99F 115 VAC 2.18 A Cast Iron
- UP26-99F 230 VAC 1.07 A Cast Iron
- UP26-116F 230 VAC 1.75 A Cast Iron
- UP26-116BF 230 VAC 1.75 A Bronze

Approved Liquid Solutions:


- Methanol
- Propylene Glycol

Additional Information:


- External Piping Connections: 1" NPT
- Maximum Operating Pressure: 150 PSI
- Minimum Operating Temperature: 20 F
- Maximum Operating Temperature: 120 F

Weight: 40 Lbs

PERFORMANCE MODEL GPM-3

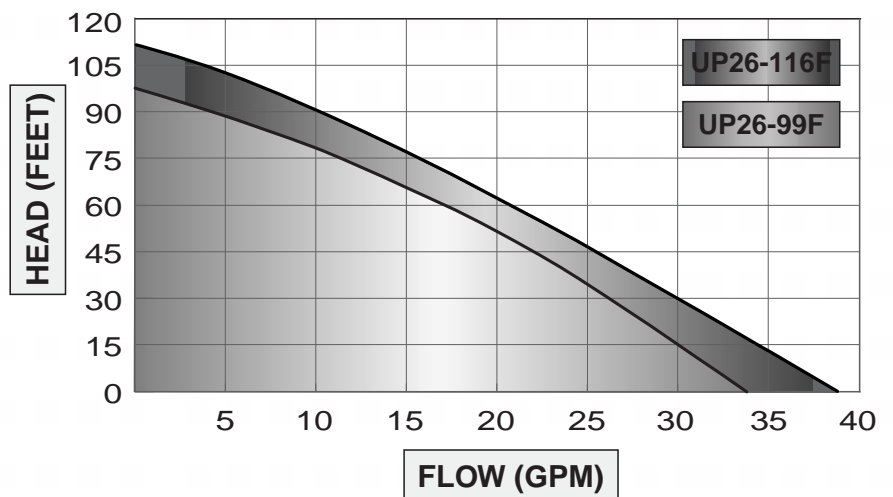

End

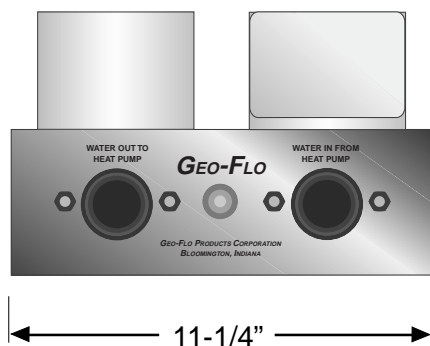

Side

