

*GEOTHERMAL LOOP PUMP MODULE*

# *GEO-FLO* **GPM-4** *ISOLATION FLANGE MODULE*

*COMING SOON... HANDHELD ELECTRONIC DISPLAY*

## *FEATURES*

Fully assembled and leak tested

Compatible with all brands

Choose between (4) Grundfos circulators

1" FPT bronze flange isolation valves

Rustproof aluminum mounting brackets

All components easily serviceable

Quiet and Reliable operation

Compact attractive design



**5-YEAR WARRANTY**  
**PARTS & LABOR**

# ***GEO-FLO PRODUCTS CORPORATION***

905 Williams Park Drive, Bedford Indiana 47421 Bus (800)784-8069 Fax (812)275-8523  
Manufacturers of quality geothermal loop pump modules and accessories since 1988

**Operation:**

When the geothermal system is operating, the circulator pumps in the GPM module energize and circulate the liquid solution through the geothermal heat pump and the earth loop, enabling the heat transfer process to occur.

**Installation:**

The GPM series loop pump modules are designed for quick and easy installation. Each module can be wall mounted using the convenient slotted mounting holes provided.

All external liquid connections are standard 1" NPT to accommodate standard fittings.

Note: Check local codes for specific installation requirements.

**Specifications:**

**Available Grundfos Circulators:**

- All Circulators 1 Phase 60 Hz
- UP26-99F 115 VAC 2.18 A Cast Iron
- UP26-99F 230 VAC 1.07 A Cast Iron
- UP26-116F 230 VAC 1.75 A Cast Iron
- UP26-116BF 230 VAC 1.75 A Bronze

**Approved Liquid Solutions:**


- Methanol
- Propylene Glycol

**Additional Information:**


- External Piping Connections: 1" NPT
- Maximum Operating Pressure: 150 PSI
- Minimum Operating Temperature: 20 F
- Maximum Operating Temperature: 120 F

Weight: 48 Lbs

**PERFORMANCE MODEL GPM-4**

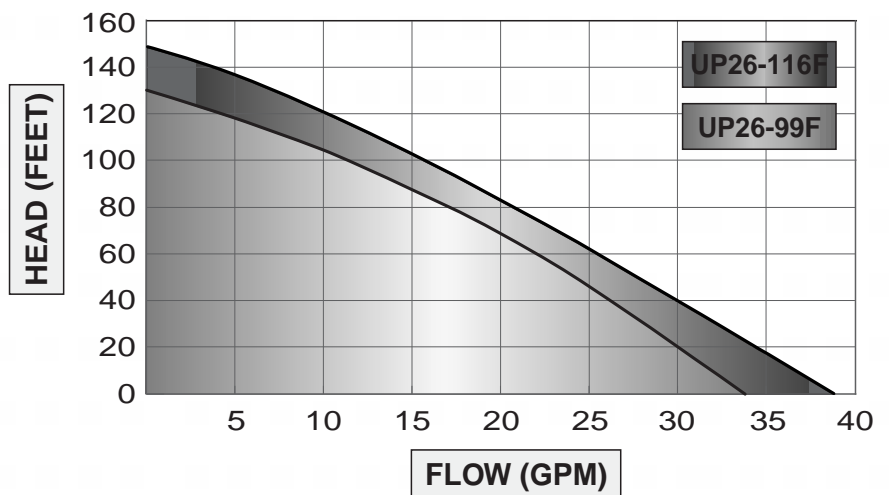

**End**

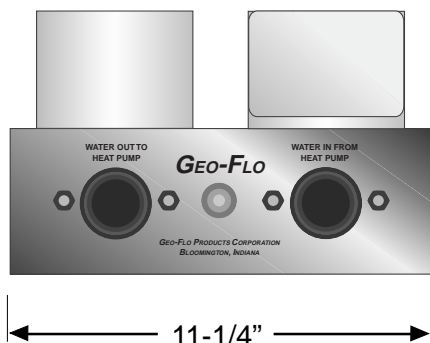

**Side**

