




Major Geothermal  
6285 West 48<sup>th</sup> Avenue, Wheat Ridge, Colorado 80033  
303 / 424-1622 voice, 303 / 423-6795 fax  
Toll free - 800 / 707-9479  
www.majorgeothermal.com



Single hydronic unit, dual load tanks, parallel piping for balanced flow. Conceptual sketch, not scaled. May not show all valves, controls, specific piping sizes, charge/purge ports or miscellaneous parts.

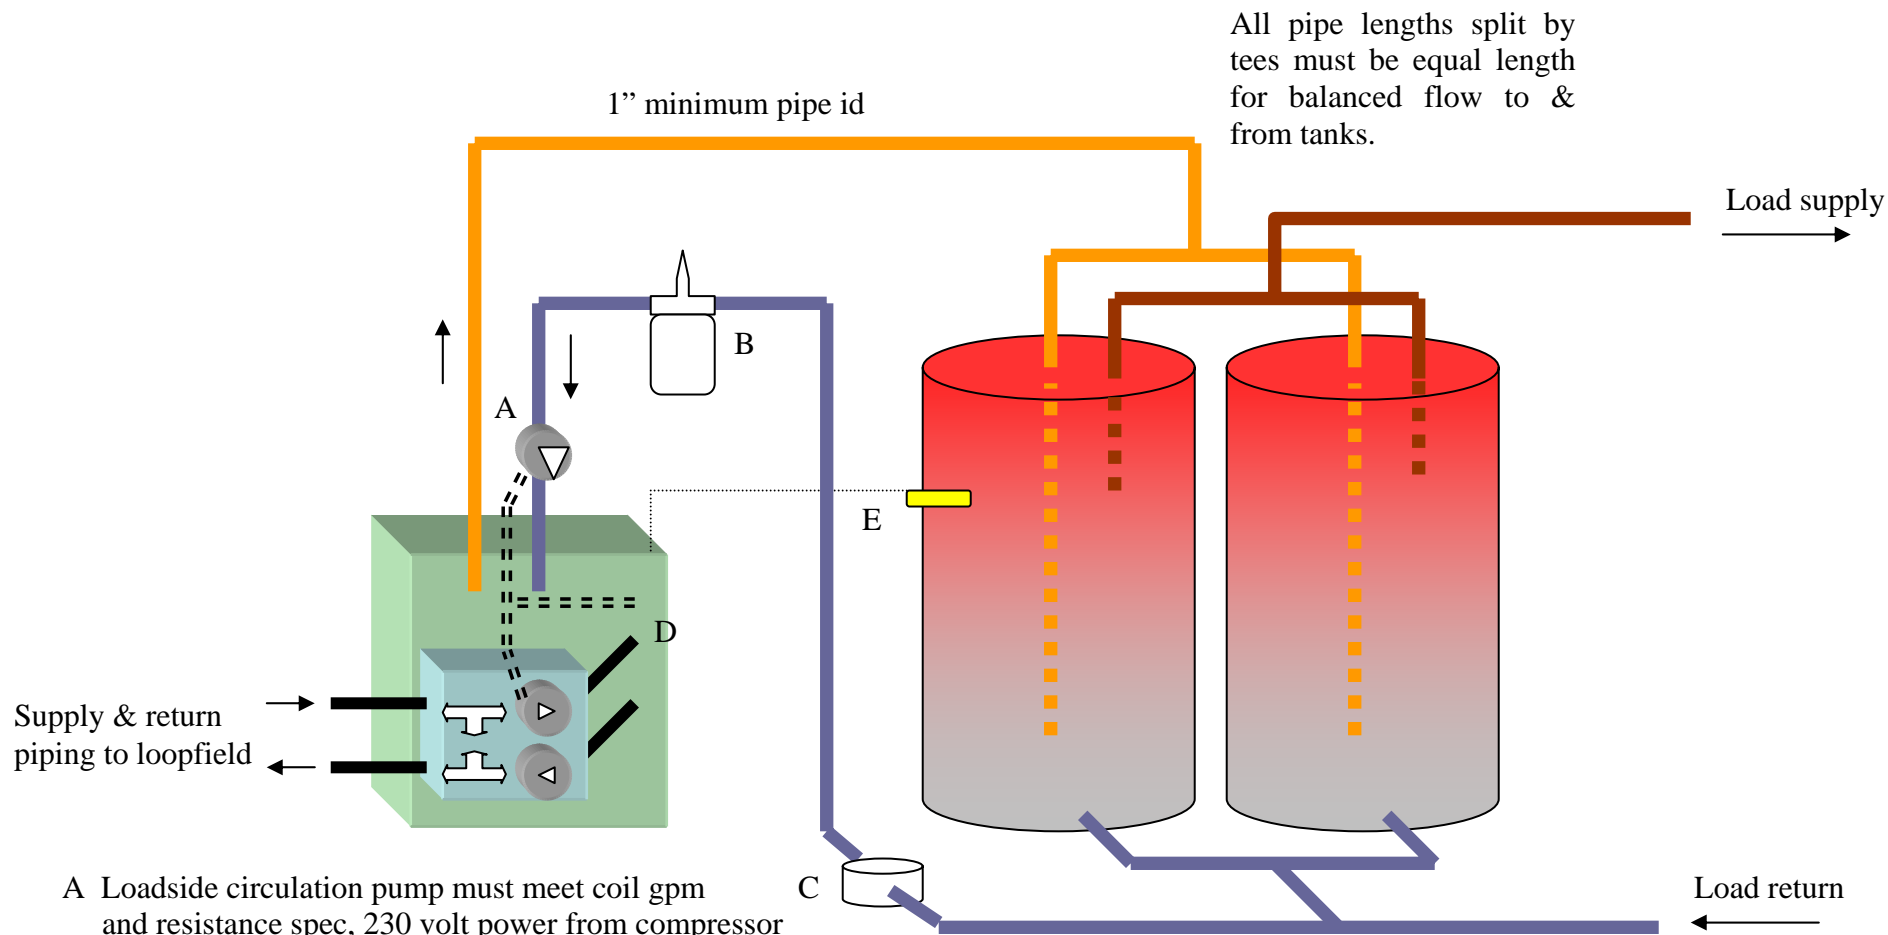

- A Loadside circulation pump must meet coil gpm and resistance spec, 230 volt power from compressor
- B Air vent bleed / pressure tank
- C Debris trap/filter
- D 230 volt / single phase from compressor

E Aquastat, 24 volt – Probe MUST be placed in well ~3/4 up from base of tank, use ONLY metallic paste between probe and well to communicate actual temperature if fit is not tight.